



TMdrive™ -MVG2 Product Guide

Medium Voltage Multilevel IGBT Drive
Up to 10,000 kVA at 11 kV

metals

paper

cement

oil & gas

mining











utilities

rubber &
plastics

Global Products for Meeting Global Needs

The TMdrive-MVG2 is a general-purpose, medium-voltage, variable-frequency AC drive for industrial power ratings up to 10 MW, in the voltage range of 3/3.3 kV, 6/6.6 kV, and 10/11 kV. Featuring high-quality Japanese design and manufacture, the TMdrive-MVG2 works with existing or new induction or synchronous motors and meets users' basic system requirements as described below:



Design Feature	Customer Benefit
 <ul style="list-style-type: none"> No electrolytic capacitor in main circuit is used. Instead long-life film capacitors are used. 	<ul style="list-style-type: none"> Minimized maintenance and operating cost. Replacement of capacitors is not required within product life.
 <ul style="list-style-type: none"> Conservative design using 1700-volt IGBTs (Insulated Gate Bipolar Transistor) 	<ul style="list-style-type: none"> Highly reliable operation and expected 100,000 hour (12 years) drive MTBF, based on field of experience with the large global installed base of TMdrive-MVG family technology
 <ul style="list-style-type: none"> High energy efficiency approx. 97% 	<ul style="list-style-type: none"> Considerable energy savings, in particular on flow control applications
 <ul style="list-style-type: none"> Diode rectifier ensures power factor greater than 95% in the typical speed control range 	<ul style="list-style-type: none"> Capacitors are not required for power factor correction
 <ul style="list-style-type: none"> Multiple level drive output waveform to the motor (21 levels for the 6.6 kV inverter, line to line voltage, peak to peak) 	<ul style="list-style-type: none"> No derating of motor for voltage insulation or heating is required due to motor-friendly waveform
 <ul style="list-style-type: none"> Multi-pulse converter rectifier and phase shifted transformer: 3.3 kV Class: 18 pulse 10 kV Class: 48 pulse 6.6 kV Class: 30 pulse 11 kV Class: 54 pulse 	<ul style="list-style-type: none"> No harmonic filter required to provide lower harmonic distortion levels than IEEE-519-1992 guidelines
 <ul style="list-style-type: none"> Designed to keep running after utility supply-transient voltage dropouts – up to 300 msec. 	<ul style="list-style-type: none"> Uninterrupted service for critical loads
 <ul style="list-style-type: none"> Synchronous transfer to line option with no interruption to motor current (Additional equipment required) 	<ul style="list-style-type: none"> Allows control of multiple motors with one drive No motor current or torque transients when the motor transitions to the AC line
 <ul style="list-style-type: none"> Input isolation transformer included in the drive package 	<ul style="list-style-type: none"> Better protection of motor Simplified installation Lower cost installation Mitigation of harmonics on the primary side
 <ul style="list-style-type: none"> Direct drive voltage output level 	<ul style="list-style-type: none"> No output transformer required to match motor voltage, saving cost, mounting space, cabling, and energy Allows easy retrofit of existing motors

Bringing Reliable Control to a Wide Variety of Industries



Cement

The TMdrive-MVG2's compartmentalized design streamlines installation, commissioning, and maintenance of medium-voltage drives in the cement industry. With a Mean Time Between Failure (MTBF) exceeding 100,000 hours (12 years), the MVG is engineered to deliver rock-solid performance in virtually any application, making the TMdrive-MVG a best choice of many consultants, end users, and cement plant builders all over the world, including:

- Raw mill fans, bag house fans
- Preheater fans, coal mill fans
- Grinding mills
- Rotary kilns



Oil and Gas

In the Oil and Gas Industry, the MVG family of drives can be seamlessly integrated with the rest of your pump station control system with a choice of either 3/3.3, 6/6.6, 10, or 11 kV. They can be applied to existing motors and cabling, making them an excellent fit in modernization/retrofit applications, including:

- Oil pumps
- Gas compressors
- Fans



Mining

Accurate torque control is a key in controlling large conveyors. The MVG2's flux vector algorithm provides the accuracy and response for this demanding application.

Mining applications include:

- Raw material conveyor
- Grinding mills
- Pumps



Utilities/Power Generation

Traditional mechanical methods of controlling flow are inefficient and require considerable maintenance. In the Power Generation Utilities Industry, the MVG2 provides more reliable, accurate, and energy-efficient control of flow while eliminating the maintenance associated with dampers, vanes, or valves on:

- Induced and forced draft fans
- Primary and secondary air fans
- Boiler feed water pumps
- Condensate extraction pumps



Metals


The metal-making part of the steel plant uses large air flows and requires high power levels supplied by the MVG2 to operate:

- Water gas fans
- BOF ID fans
- Dust collection fans
- Blast furnace blower fans
- Utility pumps

A Look on the Inside


MV Drive Technology for medium voltage operation:

- Series connected inverter cell architecture uses 1700 V IGBT inverters for best reliability and high energy efficiency
- Diode bridge rectifiers yield high power factor operation
- Multi-winding transformer produces low input power distortion
- Modular drawable power cell design minimizes the time required for any maintenance activities



Input Transformer

The special input transformer has phase-shifted secondary windings to produce multi-pulse converter operation. This design exceeds the IEEE 519-1992 guidelines for input current distortion.





I/O Board

The I/O board supports encoder, 24 V dc I/O, 115 V ac inputs and analog I/O, standard. All I/O are terminated to a two-piece modular terminal block for ease of maintenance, located in right hand cabinet.

Main Power Input

Four voltage levels are available:

- **3-3.3 kV**, 3-phase, 50/60 Hz
- **6-6.6 kV**, 3-phase, 50/60 Hz
- **10 kV**, 3-phase, 50/60 Hz
- **11 kV**, 3-phase, 50/60 Hz

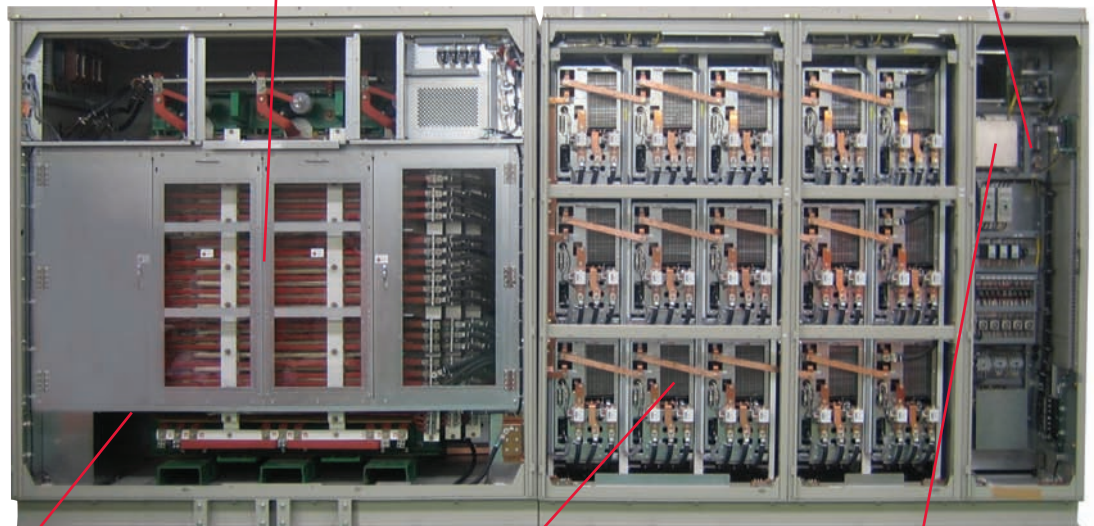

Air Cooling

Forced air cooling system with:


- Intake through cabinet doors
- Upward flow through inverter cells and transformer
- Exhaust at top of cabinet



Cell Inverters

Example: Three banks of five series connected inverter cells, each containing:

- Diode bridge rectifier
- IGBT PWM inverter
- DC link long-life film capacitor
- Drawable module for ease of maintenance



Control Functions


A single set of control boards feeds all inverter cells. The primary control board performs several functions:

- Speed and torque regulation
- Sequencing
- I/O mapping
- Diagnostic data gathering
- Provision for optional LAN interface



Slide-Out Inverter Modules

Each inverter cell contains a three-phase diode converter and a single-phase IGBT inverter, connected by a DC bus. One cell module is shown opposite, drawn out of the rack on a slide for service. All the modules are the same; refer to the diagram below. The mean time to repair the drive (MTTR) is 30 minutes or less.

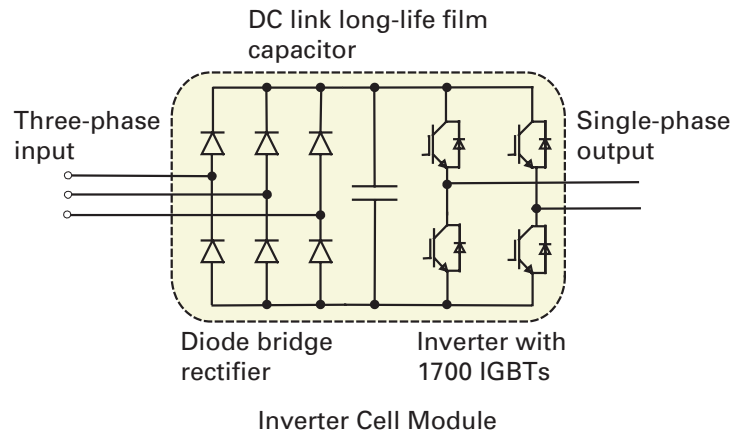


Inverter Cell Module Removed from Rack




Switching Devices

Switching devices are Insulated Gate Bipolar Transistors (IGBT)

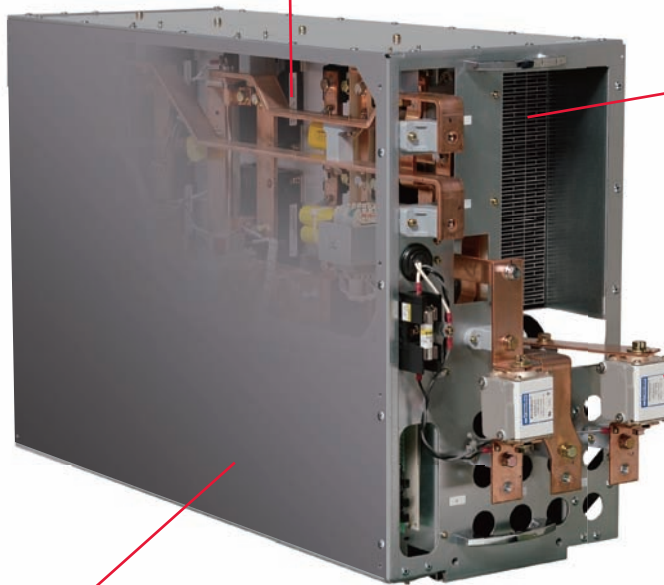


Cooling Heat Sink

Heat is transferred from the switching device heat sink to the cooling air



Input Fuse

Fused three-phase inputs to converter



Control Board

- Board passes Pulse Width Modulated control signal to the gate drivers
- Gate driver circuit boards connect directly to IGBTs



Right Side View




DC Link long-life capacitors

No electrolytic capacitor in main circuit is used. Replacement of capacitors is not required within product life.

TMdrive-MVG2 Architecture

The TMdrive-MVG2 main circuit consists of an input transformer and single-phase PWM inverter cells. For 3 kV, three inverter cells are series connected to create an output with 7 output voltage levels.

TMdrive-MVG2 (3 kV class)

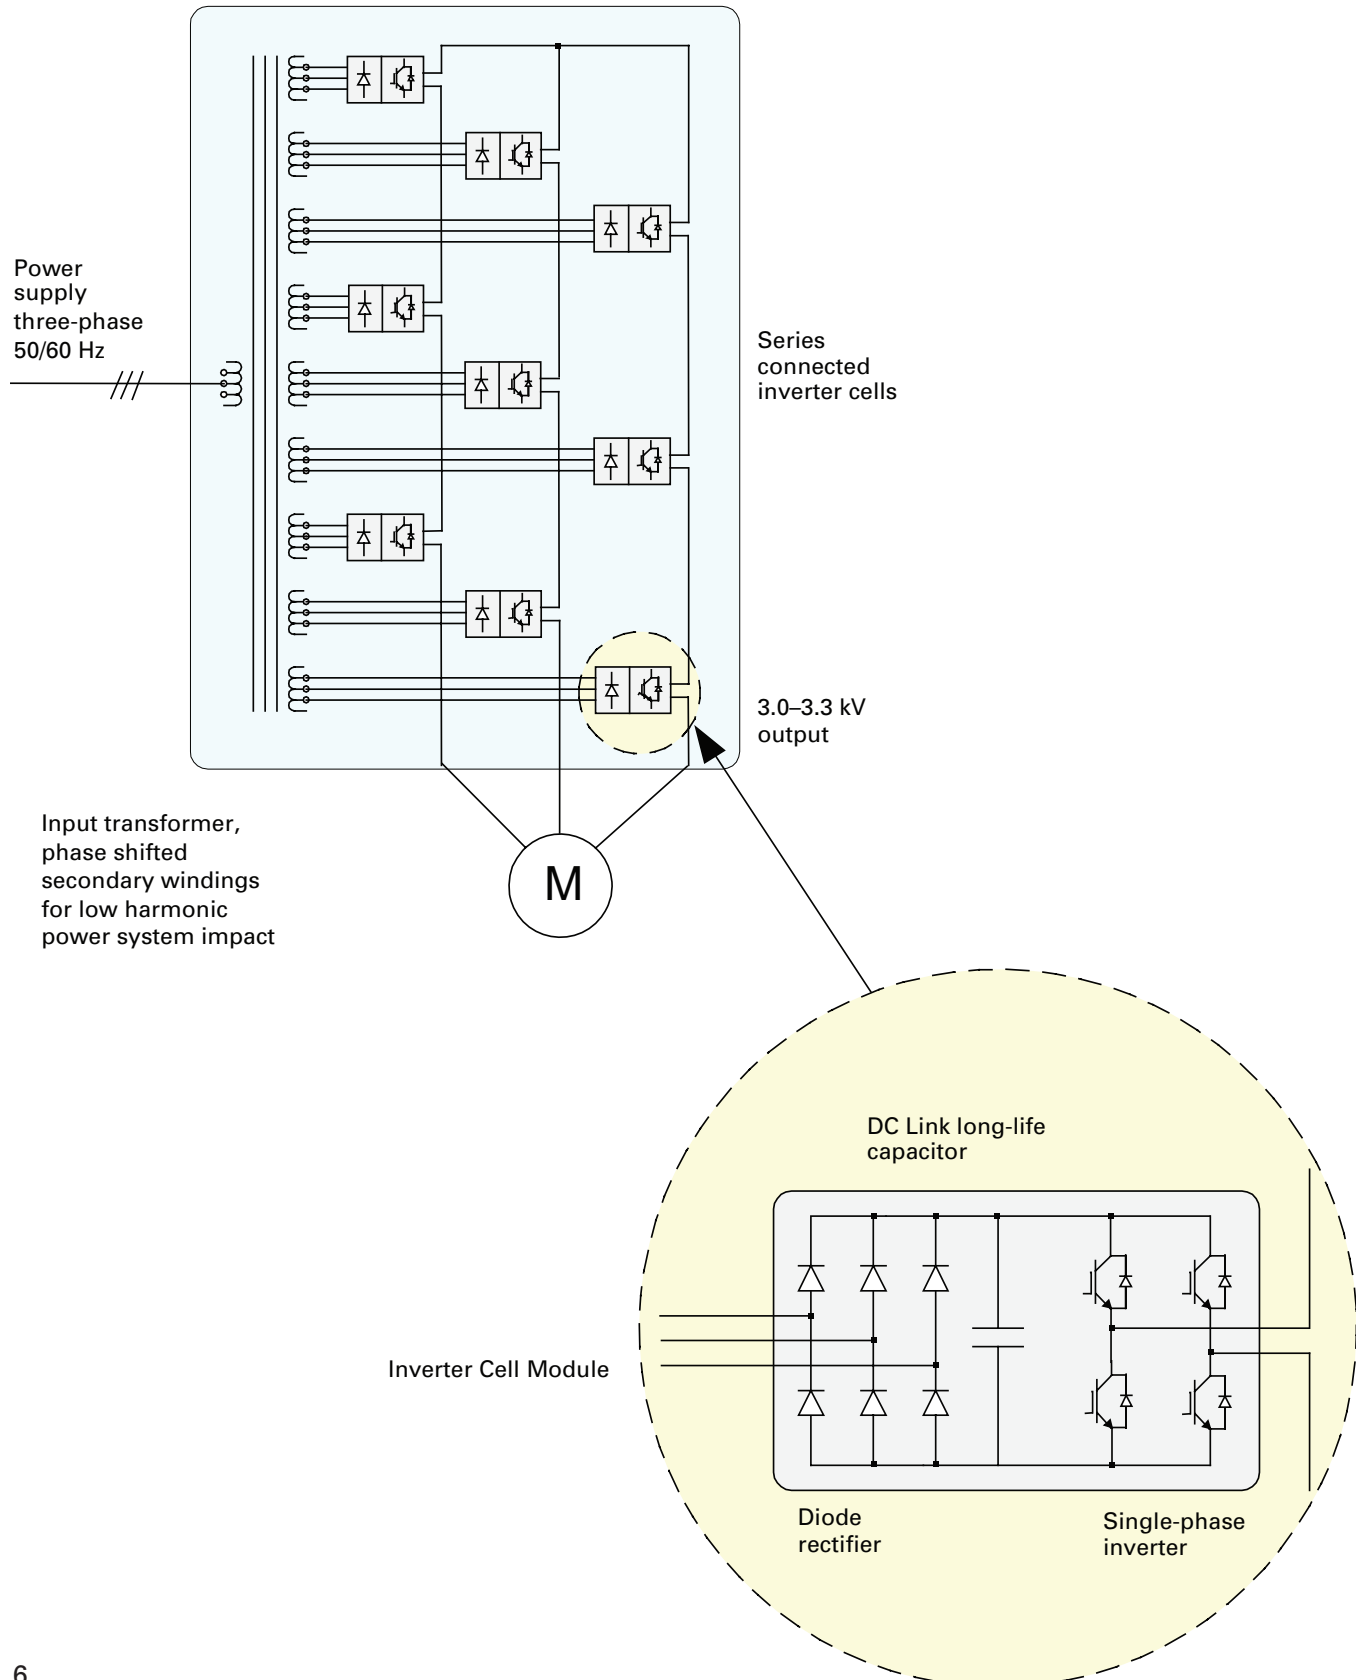

TMdrive-MVG2 Specifications

3.0/3.3 kV TMdrive-MVG2

Frame	Rated Output Current Amps *1		3.0 kV Output kVA	3.3 kV Output kVA	Approx. Motor Power HP @3.3 kV *2	Approx. Motor Power kW @3.3 kV *2	Panel Width mm (inch)	Panel Height with channel base mm (inch)	Panel Depth mm (inch)	Approx. Weight kg (lbs)
	125%	110%								
I	35	35	180	200	200	160	2100 (83)	2690 (106)	900 (36)	2760 (6072)
	53	53	270	300	335	250				
	70	70	360	400	340	320				
	73	—	375	415	460	340				
	—	77	400	440	480	355				
II	105	105	540	600	600	450	2200 (87)			3770 (8294)
	140	140	720	800	880	650				
	147	—	760	840	930	685				
III	—	154	800	880	960	710	2800 (111)		1000 (40)	4570 (10054)
	166	166	860	950	1000	750				
	192	192	1000	1100	1200	900				
	201	—	1035	1150	1250	935				
	—	210	1080	1200	1300	970				
IV	227	227	1180	1300	1350	1000	3100 (122)		1100 (44)	5610 (12342)
	263	263	1360	1500	1700	1250				
	275	—	1420	1570	1750	1300				
	—	289	1500	1650	1800	1340				
V	315	315	1630	1800	1900	1400	4000 (158)	2860 (113)	1100 (44)	6600 (14520)
	350	350	1810	2000	2100	1600				7000 (15400)
	385	385	2000	2200	2400	1800				
VI	420	420	2200	2400	2700	2000	4600 (182)		1300 (52)	8220 (18084)
	525	525	2720	3000	3400	2500				
VII	CF 665	CF 665	3450	3800	4250	3150	11800 (465)		1100 (44)	later
	CF 733	CF 733	3770	4150	4800	3550				
VIII	CF 798	CF 798	4090	4500	5250	3900	12800 (504)		1300 (52)	later
	CF 997	CF 997	5180	5700	6750	5000				

Notes:

*1 1.25 PU or 1.1 PU overload, 60 sec rating; use Frame Amp rating for most acceptable match with motor

*2 Approximate capacity for 3.3 kV-based 4-pole induction motors

CF There are two banks; consult factory for dimensions and weights

Redundant cooling fans increase height

TMdrive-MVG2 Specifications

6.0/6.6 kV TMdrive-MVG2

Frame	Rated Output Current Amps *3		6.0 kV Output kVA	6.6 kV Output kVA	Approx. Motor Power HP @6.6 kV *4	Approx. Motor Power kW @6.6 kV *4	Panel Width mm (inch)	Panel Height with channel base mm (inch)	Panel Depth mm (inch)	Approx. Weight kg (lbs)
	125%	110%								
I	35	35	360	400	425	315	3200 (126)	2640 (104)	900 (36)	4310 (9482)
	53	53	540	600	610	450				
	70	70	720	800	875	650				
	73	—	760	835	920	680				
	—	77	800	880	960	710				
II	87	87	900	1000	1100	810	4000 (158)	2690 (106)		5680 (12496)
	105	105	1090	1200	1350	1000				
	122	122	1260	1400	1530	1130	4000 (158)	2690 (106)	1000 (40)	6380 (14036)
	140	140	1450	1600	1690	1250				
	147	—	1520	1680	1850	1360				
	—	154	1600	1760	1920	1420				
III	166	166	1720	1900	2160	1600	5000 (197)	2740 (108)	1000 (40)	7730 (17006)
	192	192	2000	2200	2430	1800				
	201	—	2010	2230	2450	1810				
	—	210	2160	2400	2620	1940				
IV	227	227	2360	2600	3050	2250	5100 (201)	2760 (109)	1100 (44)	9030 (19866)
	262	262	2720	3000	3380	2500				
	275	—	2830	3140	3450	2540				
	—	289	3000	3300	3610	2670				
V	315	315	3270	3600	3780	2800	6100 (241)	2860 (113)	1200 (48)	11760 (25872)
	350	350	3630	4000	4260	3150				
	385	385	4000	4400	4800	3550				
VI	420	420	4360	4800	5400	4000	6300 (248)	2860 (113)	1400 (56)	13850 (30470)
	473	473	4900	5400	6080	4500				
	525	525	5450	6000	6750	5000				
VII	CF 598	CF 598	6180	6800	7560	5600	15800 (622)	2860 (113)	1200 (48)	later
	CF 665	CF 665	6900	7600	8780	6500				
	CF 733	CF 733	7590	8350	9600	7100				
VIII	CF 798	CF 798	8270	9100	10800	8000	16200 (638)	2860 (113)	1400 (56)	later
	CF 898	CF 898	9320	10260	11500	8500	16600 (654)			
	CF 997	CF 997	10360	11400	13500	10000	16800 (662)			

Notes:

*3 1.25 PU or 1.1 PU overload, 60 sec rating; use Frame Amp rating for most acceptable match with motor

*4 Approximate capacity for 6.6 kV-based 4-pole induction motors

CF There are two banks; consult factory for dimensions and weights

Redundant cooling fans increase height

10/11 kV TMdrive-MVG2

Frame	Rated Output Current Amps *5		10 kV Output kVA	11 kV Output kVA	Approx. Motor Power HP @11 kV *6	Approx. Motor Power kW @11 kV *6	Panel Width mm (inch) @10 kV / 11 kV	Panel Height with channel base mm (inch)	Panel Depth mm (inch)	Approx. Weight kg (lbs) @10 kV / 11 kV
	125%	110%								
I	35	35	600	660	700	500	5300 (209) / 5600 (221)	3060 (121)	1400 (56)	8280 (18210) / 8620 (18960)
	53	53	900	990	1100	800				
	70	70	1200	1320	1400	1000				
	73	—	1260	1390	1420	1040				
	—	77	1330	1460	1420	1040				
II	87	87	1500	1650	1800	1350	6400 (252) / 6800 (268)	3060 (121)	1400 (56)	9590 (21090) / 10280 (22610)
	105	105	1800	2000	2200	1600				
	122	122	2100	2310	2500	1800				
	139	139	2400	2640	2760	2040				
	147	—	2550	2800	2920	2160				
	—	154	2660	2930	3210	2375				
III	162	162	2800	3080	3400	2500	6900 (272) / 7500 (296)	3100 (122)	1500 (60)	12800 (28160) / 13560 (29830)
	191	191	3300	3630	3780	2800				
	201	—	3480	3830	4000	2960				
	—	210	3630	4000	4400	3250				
IV	226	226	3900	4290	4500	3500	7100 (280) / 7700 (304)	3100 (122)	1500 (60)	14960 (32900) / 15880 (34930)
	263	263	4500	5000	5200	3860				
	275	—	4760	5240	5500	4045				
	—	289	5000	5500	5940	4400				
V	315	315	5400	6000	6500	4900	11600 (457) / 12200 (481)	3100 (122)	1500 (60)	23630 (51980) / 24490 (53870)
	347	347	6000	6600	7200	5400				
	386	386	6680	7350	7800	5800				
VI	420	420	7200	8000	8700	6500	11600 (457) / 12200 (481)	3100 (122)	1500 (60)	27470 (60430) / 28520 (62740)
	473	473	8100	9000	9800	7300				
	525	525	9000	10000	10900	8000				
VII	CF 733	CF 733	12600	13900	16200	12000	13900 (548) / 14500 (571)	3100 (122)	3860 (151)	63140 (138900) / 65240 (143520)
VIII	CF 1024	CF 1024	17500	19500	21600	16000				

Notes:

*5 1.25 PU or 1.1 PU overload, 60 sec rating; use Frame Amp rating for most acceptable match with motor

*6 Approximate capacity for 11 kV-based 4-pole induction motors


CF There are two banks; consult factory for dimensions and weights

Redundant cooling fans increase height

TMdrive-MVG2 Specifications

Cabinet Minimum Maintenance Space

Drive	Frame	Front Side Space	Rear Side Space	Ceiling Height
3/3.3 kV class	I	1600 mm (63 in)	20 mm (0.8 in)	3050
	II	1600 mm (63 in)	20 mm (0.8 in)	
	III, IV	1700 mm (67 in)	20 mm (0.8 in)	3100
	V, VII	1700 mm (67 in)	20 mm (0.8 in)	
	VI, VIII	1900 mm (75 in)	20 mm (0.8 in)	
6/6.6 kV class	I	1600 mm (63 in)	20 mm (0.8 in)	3050
	II	1600 mm (63 in)	20 mm (0.8 in)	
	III, IV	1700 mm (67 in)	20 mm (0.8 in)	3100
	V, VII	1700 mm (67 in)	20 mm (0.8 in)	
	VI, VIII	1900 mm (75 in)	20 mm (0.8 in)	
10/11 kV class	I	1800 mm (71 in)	600 mm (24 in)	3500
	II	1800 mm (71 in)	600 mm (24 in)	
	III, IV	1900 mm (75 in)	600 mm (24 in)	3550
	V, VII	2000 mm (79 in)	600 mm (24 in)	
	VI, VIII	2000 mm (79 in)	600 mm (24 in)	

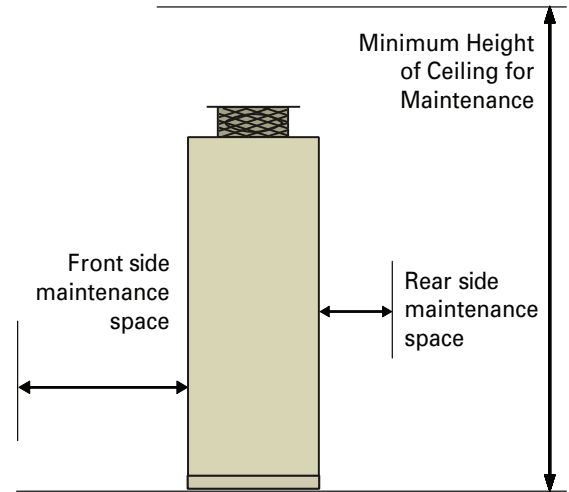


Notes

- $kVA_{Inverter} = \frac{Power_{Mtr Shaft}}{Mtr PF \times Mtr Eff}$
 $I_{Phase} = \frac{kVA_{Inverter} \times (1000)}{(\sqrt{3} \times V_{Mtr Line to Line})}$
 - Mtr PF = 0.87, Mtr Eff = 0.94, ambient temperature is 32°F–104°F (0°C–40°C).
 - Ratings based on a variable torque load (industrial fans and pumps).
 - Altitude above sea level is 0–3300 ft (0–1000 m).
 - Dimensions to top of cooling fans are for the nonredundant type fans.
- An optional bypass circuit can be separately mounted.
- Redundant cooling fans are available as an option; overall height increases.
- No rear access is required except for 10/11 kV Class drives.
- Incoming power cabling and motor cabling are bottom entry; top entry is an option.
- Air is pulled in through the filters in the cabinet doors and vented out the top.
- Available options include motor cooling fans and control, cabinet space heater, bypass power/control and dv/dt filter, HV input, sync motor control, smooth transfer to and from utility.
- For conservative sizing of cooling equipment, heat rejection is 3 kW/100 kVA (3 kW/100 hp) of output power.
- The panels are fixed to the channel bases and shipped.


Features of the TMdrive-MVG2

A Clean Wave Inverter

Using the multiple winding input transformer, the TMdrive-MVG2 has multi-pulse rectification and more than meets the requirements of IEEE-519 (1992). This reduces the harmonic current distortion on the power source and protects the other equipment in the plant. The harmonic current content measured in an actual load test is compared with IEEE-519 in the chart opposite.




Typical Input Wave Forms

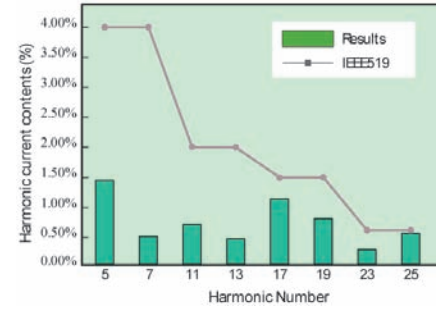


Typical Harmonic Contents of Input Current for 18-pulse System

A Clean Output Wave

As a result of the multilevel PWM control, the output waveform is close to a sine wave, and the heat loss caused by harmonics is negligible. In addition, harmonic currents in the motor are minimized so there is very little torque ripple on the output shaft.

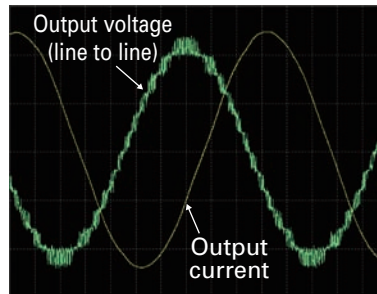

Current and Voltage Output Waveforms for 3 kV Drive

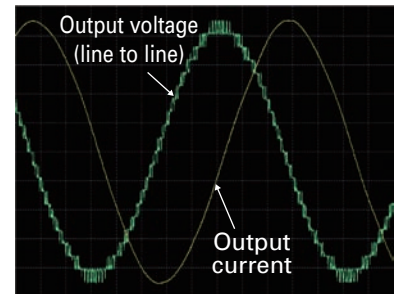

Current and Voltage Output Waveforms for 6 kV Drive

A Higher Efficiency than Conventional Drives

Actual factory load tests show the drive efficiency is approximately 97% (design value). This high efficiency is a result of:

- A smaller number of switching semiconductors by using 1700 V IGBTs
- Lower switching frequencies using multilevel PWM control reduce the switching loss of each IGBT
- Direct connection of MV motor without an output transformer

Example: 6.6 kV drive at 6,000 kVA and 50 Hz			
Current	100%	75%	50%
Efficiency	97.1%	97.2%	97.5%
Except for the consumption of control power and auxiliary power.			


A High Input Power Factor

Each inverter cell has a diode bridge rectifier. As a result, the input power factor is above 95% over the entire normal operating speed range, even when driving a multiple-pole induction motor of low power factor. With this high power factor, no power factor correction capacitor is required.

Power Factor in <i>Italic</i> , Expressed in % * = Interpolated Value		Percent of Top Speed vs % PF Lagging				
		20	40	60	80	100
Percent of Full Load	20	94.7%	95.5%	*95.6%	*95.7%	95.8%
	40		96.6%	96.7%	*96.4%	96.2%
	60			96.3%	96.4%	96.4%
	80				96.1%	96.8%
	100					97.1%
Examples of measured power factor						

Common Control Boards to Reduce Cost of Ownership

Standard Connections

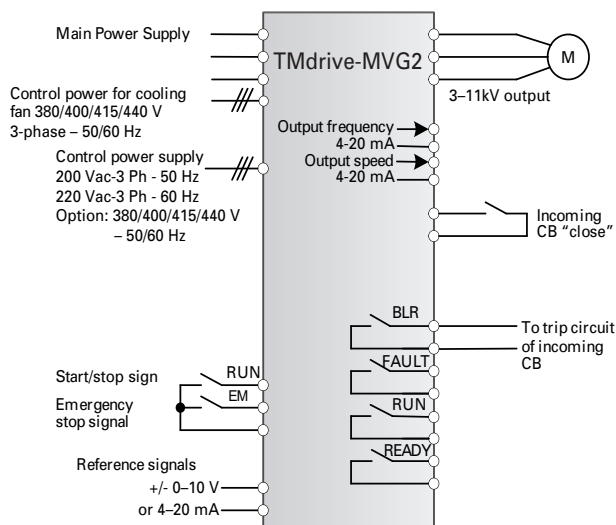

Control I/O

Control Area	Specifications
Analog Inputs	(2) ± 10 V or 4–20 mA, configurable, differential
Analog Outputs	(4) ± 10 V, 8-bit, configurable, 10 mA max
Digital Inputs	(2) 24–110 V dc or 48–120 V ac; (6) 24 V dc, configurable
Digital Outputs	(6) 24 V dc open collector 50 mA
Speed Feedback Encoder Input	High-resolution tach, 10 kHz, 5 or 15 V dc diff. input, A Quad B, with marker
LAN Interface Options	Profibus-DP, ISBus, DeviceNet™, Modbus RTU
Motor Temperature Sensor	High-resolution torque motor temperature feedback: 1 K Ohm platinum resistor or 100 Ohm platinum RTD (uses analog input with signal conditioner)

Display and Diagnostics

	Specifications
PC Configuration	Control System Drive Navigator for configuration, local and remote monitoring, animated block diagrams, dynamic live and capture buffer based trending, fault diagnostics, commissioning wizard, and regulator tune-up wizards. Ethernet 10 Mbps point to point or multi-drop, each drive has its own IP address
Keypad and Display	Backlit LCD, animated displays <ul style="list-style-type: none"> Parameter editing Four configurable bar graphs Drive control
Instrumentation Interface	Two analog outputs dedicated to motor current feedback, plus five analog outputs that can be mapped to variables for external data logging and analysis

Additional Specifications

Power System Input and Harmonic Data

- Voltage: up to 11 kV, 3-phase, +10%/–10%
- Tolerates power dips up to 25% without tripping, complete power loss ride through of 300 msec
- 125% Overload (OL) for 60 seconds; other OL ratings available
- Frequency: 50 Hz or 60 Hz, $\pm 5\%$
- Power factor (PF): 0.95 lag
- True PF: greater than 0.95 lag over 40–100% speed range
- Exceeds the IEEE 519-1992 standard for harmonics, without filters
- Bottom cable entry

Converter Type

- AC-fed multi-pulse diode using phase shifted transformer

Transformer

- Dry type transformer
- Air cooled type
- Multi LV windings

Inverter

- Multilevel inverter cells:
 - three in series for 3.3 kV inverter
 - five in series for 6.6 kV inverter
 - eight in series for 10 kV inverter
 - nine in series for 11 kV inverter
- 0–72 Hz
- Up to 120 Hz, option for 3/3.3 and 6/6.6 kV
- For 10/11 kV, maximum frequency 72 Hz
- Multilevel output for motor-friendly waveform

Applicable Standards

- IEC61800-4, JIS, JEC, JEM

Control

- Nonvolatile memory for parameters and fault data
- Vector control with or without speed feedback, or Volts/Hz
- Designed to keep running after utility supply transient voltage dropouts of 300 ms
- Synchronous transfer to line option
- Synchronous motor control (option)

Vector Control Accuracy and Response

- Maximum speed regulator response: 20 rad/sec
- Speed regulation without speed sensor $\pm 0.5\%$
- Maximum torque current response: 500 rad/sec
- Torque accuracy: $\pm 3\%$ with temp sensor, $\pm 10\%$ without

Major Protective Functions

- Inverter overcurrent, overvoltage
- Low or loss of system voltage
- Motor ground fault
- Motor overload
- Cooling fan abnormal
- Over-temperature
- CPU error

Mechanical Specifications

Operating Environment and Needs

- Temperature: 0° to +40°C
- Humidity: 85% maximum, noncondensing
- Altitude: Up to 1000 m (3300 ft) above sea level:
- Fan: 380/400/440 Vac, 3 phase, 50 Hz or 60 Hz

Cooling

- Air-cooled with fans on top

Sound

- Approx. 76-79 dB(A)@50Hz, at 3.1ft (1 m) from enclosure
- Approx. 80-83 dB(A)@60Hz, at 3.1ft (1 m) from enclosure

Enclosure

- IP30 except for fan openings (IEC 60529), NEMA1 gasketed equivalent
- Color: Munsell 5Y7/1 (Option: ANSI 61 gray, RAL7032 etc.)

Drive/Motor Monitoring

Operator Keypad

High Function Display

- LCD backlight gives great visibility and long life
- Bar graphs, icons, menus, and digital values combine to provide concise status information, often eliminating the need for traditional analog meters



Easy-to-understand navigation buttons allow quick access to information without resorting to a PC-based tool

Switch to local mode to operate the equipment from the keypad

RJ-45 Ethernet port is used for the local Drive Navigator (toolbox) connection

Instrumentation Interface

- Two analog outputs are dedicated to motor current feedback
- Five analog outputs are mapped to variables for external data logging and analysis

Interlock button disables the drive

Display Group	Icon	Status Indication
Heartbeat		Communication OK
		Communication error
Control State		Local mode
		Remote mode
		Test mode
Fault State	Blank	Drive OK
		Alarm state
		Trip fault
Drive Indication		Forward rotation
		Reverse rotation
Motion		Drive not ready
		Drive not running
		Drive running forward
		Drive running reverse


Multi-language Keypad – Optional Operator Interface (below)



The optional multi-language keypad is a touch-panel display with the same functionality as the standard keypad. Chinese version is shown here. The main features are:

- 5.7 inch (145 mm) LCD color display
- Choice of languages, touch selection:
 - English
 - Japanese
 - Chinese
 - Russian
 - Spanish
 - French
 - Portuguese
 - Italian
 - Korean
- The Ethernet communication with the drive, analog check pins, interlock button, and status LEDs are mounted separately

Drive Navigator — Configuration, Monitoring & Analysis

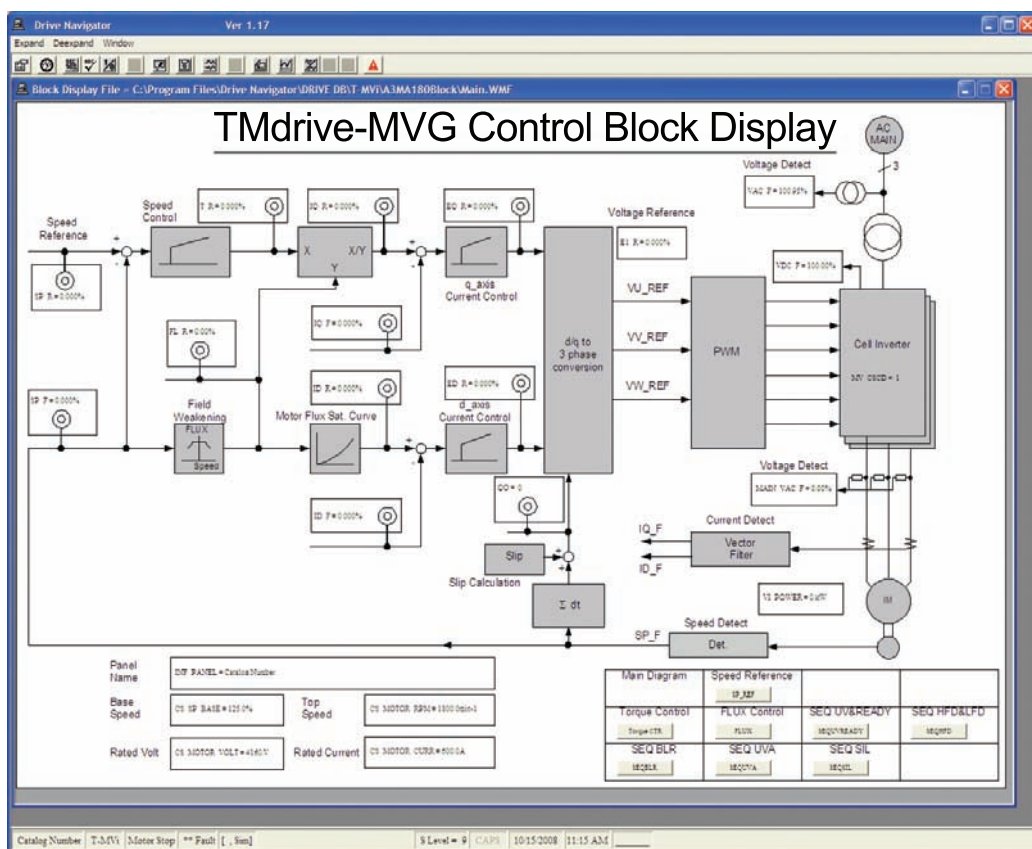

Real-Time Drive Block Diagram

Drive Configuration

All the TMdrive family of drives are configured and commissioned with the Windows-based Drive Navigator. Wizards intelligently guide the user through the required steps. Included are live block diagrams, highly integrated help, and high-performance diagnostics. Several sets of drives can be maintained using Ethernet communication. The control block display opposite shows the main drive control functions together with real-time values of the important variables. Available Navigator functions include:

Parameter (Set Point) Control

- Loading and saving a parameter file
- Changing a parameter
- Comparing parameter files

Support Functions


- Control block display
- Snapshot function
- Step response test
- Response wave display

Drive Troubleshooting

This screen displays a drive first fault and shows selected trend displays to assist in determining the cause. The fastest trend displays four variables sampled at a rate of 333 microseconds. The other two slower trends are sampled at 1 millisecond and 100 milliseconds.

Available Troubleshooting Functions:

- First fault display
- Operation preparation display
- Fault trace back
- Trouble records
- Fault history display
- Online manual

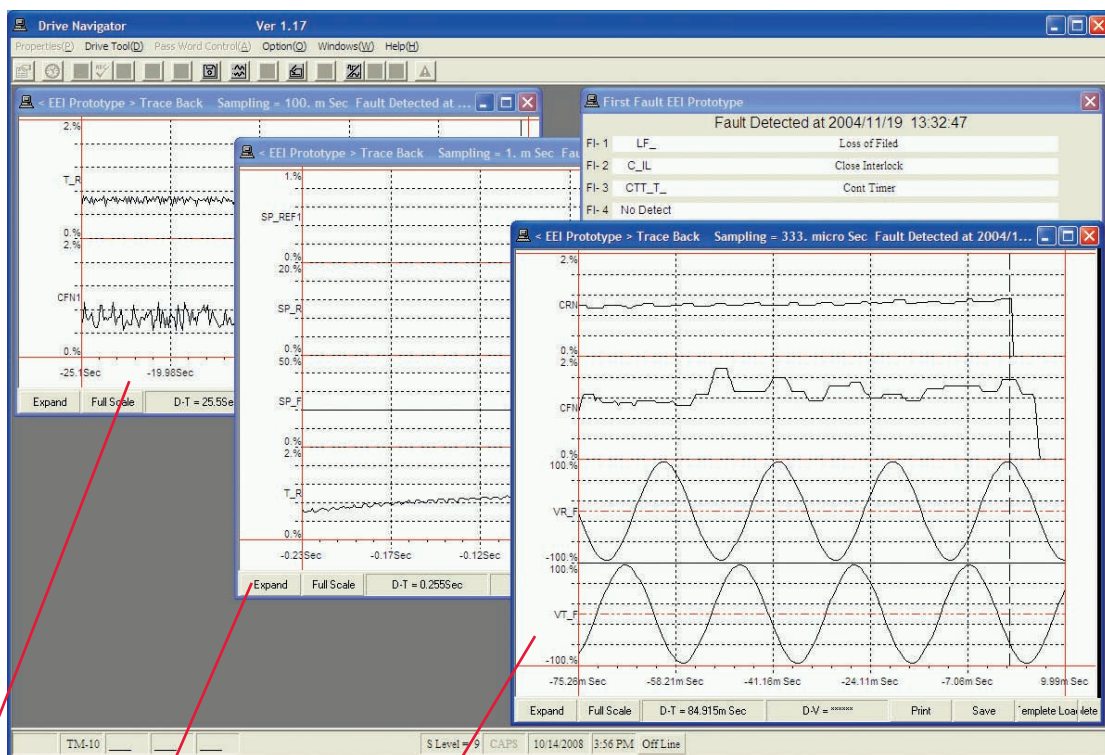

100 msec. sampling

1 msec. sampling



333 micro sec. sampling

Energy Savings Payback Calculations


Replacing a mechanical speed control device with an adjustable speed drive usually produces large energy savings plus a reduction in maintenance costs. This appendix outlines how the energy savings can be calculated as follows:

1. Calculate the cost of energy used by the electric drive speed control system, outlined on this page.
2. Calculate the cost of energy used by the mechanical speed control system, outlined on the next page.

The difference is the **energy cost savings**. Typical power consumption curves for pumps and fans are shown below.

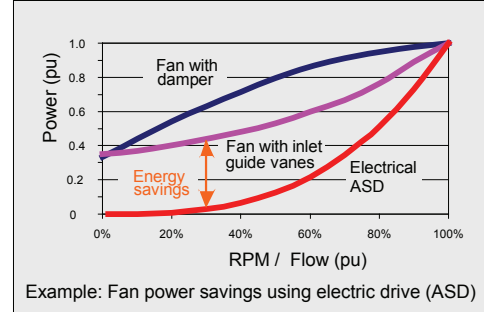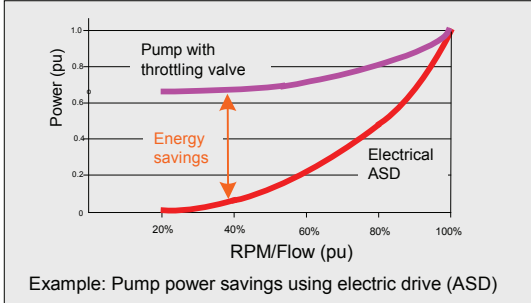


Below is an example of the energy cost calculation for a pump driven by a motor and electric drive. The calculation for the mechanical system is similar and is described on the next page. Since energy consumption varies with speed and flow, you need the load profile table which shows the number of hours running at the various flows. Refer to the example below.

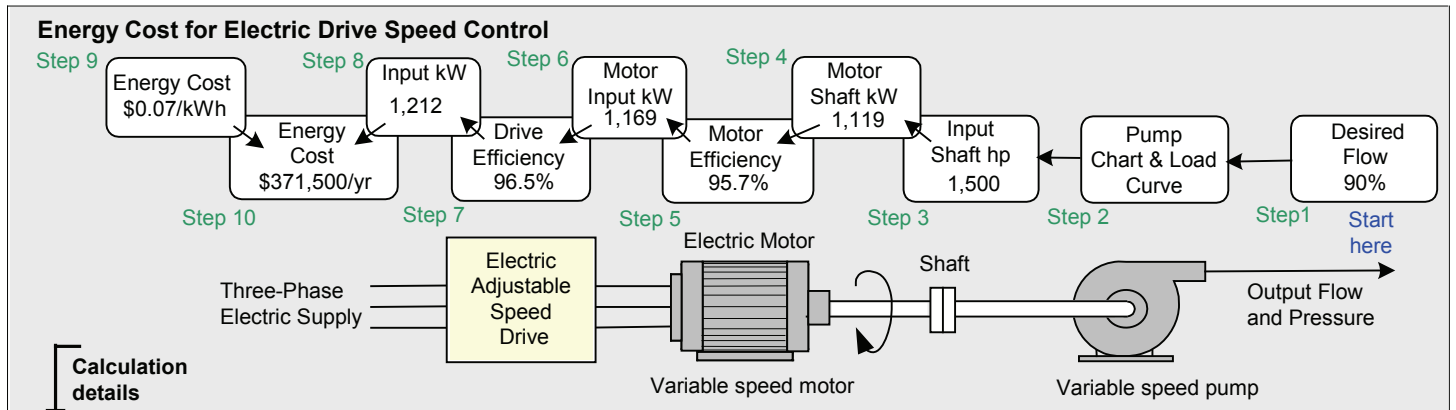

Step	Calculation details	Pump Performance Chart & Load Curve	Notes																
Step 1	Select the desired pump output flow, for example 90%, and number of hours/day at this flow, for example 12.		Overlay the load pressure-flow curve on the pump chart and find the pump input shaft horsepower at the 90% flow (point B). You need the load profile. See example below. Pump input power at N2 rpm = 1,500 hp at point B, 90% flow.																
Step 2	Obtain the variable speed pump performance chart and the load pressure-flow curve, which is the flow resistance of the process being fed.		<table border="1"> <thead> <tr> <th colspan="5">Daily Load Profile (example)</th> </tr> <tr> <th>Operation Hours/day</th> <td>5</td> <td>12</td> <td>5</td> <td>1</td> <td>1</td> </tr> <tr> <th>Percent Flow</th> <td>100%</td> <td>90%</td> <td>80%</td> <td>70%</td> <td>60%</td> </tr> </thead></table>	Daily Load Profile (example)					Operation Hours/day	5	12	5	1	1	Percent Flow	100%	90%	80%	70%
Daily Load Profile (example)																			
Operation Hours/day	5	12	5	1	1														
Percent Flow	100%	90%	80%	70%	60%														
Step 3	Find the pump input power.																		
Step 4	Convert the input shaft horsepower to shaft kW	Conversion: Horsepower x 0.746 = kW	Input shaft kW = 1,500 hp x 0.746 = 1,119 kW																
Step 5	Obtain the electric motor efficiency	Example: Induction motor efficiency 95.7% from manufacturer's data sheets (find at each RPM)	Motor input power = 1,119 kW/0.957 Efficiency = 1,169 kW																
Step 6	Obtain the adjustable speed drive efficiency	Example: Drive efficiency 96.5% from manufacturer's data sheets (find at each RPM)	Drive input power = 1,169 kW/0.965 Efficiency = 1,212 kW																
Step 7	Obtain the electric power cost	Example: Energy cost = \$0.07/kWh. Calculate cost for the hours at this flow from load profile; in this example it is 12 hours/day.	Energy cost = 1,212 kW x 0.07\$/kWh x 12 hrs/day x 365 days per year = \$371,500 per year. (Repeat calculation for other flows in load profile and total).																
Step 8																			
Step 9																			
Step 10																			

TMEIC Drives Offer Complete Coverage

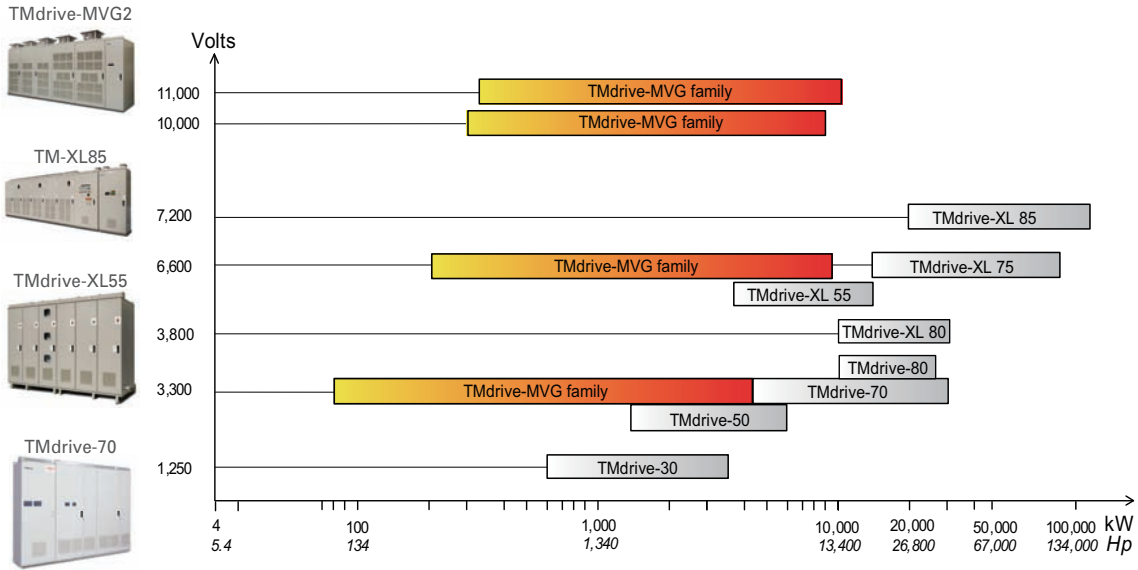

Global Office Locations:

Toshiba Mitsubishi-Electric Industrial Systems Corporation
Mita 43 MT Bldg. 13-16 Mita 3 chome, Minato-ku, Tokyo
108-0073, Japan
Tel.: +81-3-5441-9788 Fax: +81-3-5441-9795
Web: www.tmeic.co.jp/global/index.html

Overseas Affiliates

U.S.A

TMEIC Corporation

Office Location: 1325 Electric Road, Roanoke VA 24018 U.S.A.
Mailing/Receiving Address: 2060 Cook Drive, Salem,
Virginia 24153 U.S.A.

Tel.: +1-540-283-2000 Fax: +1-540-283-2001
Web: www.tmeic.com/

Houston Branch Office

2901 Wilcrest Drive, Suite 110, Houston, TX 77042, U.S.A.
Tel.: +1-713-784-2163 Fax: +1-713-784-2842

EUROPE

TMEIC Europe Limited

6-9 The Square, Stockley Park, Uxbridge, Middlesex, UB11 1FW, U.K.
Tel.: +44-870-950-7220 Fax: +44-870-950-7221

Germany Branch Office

Buro Deutschland, Kaiserlei Strasse 43, 63067 Offenbach
Tel.: +49-699-819-4722 Fax: +49-69-9819-4710

Italy Branch Office

Via Edmondo Caccuri, 7int. 7, 70124 Bari
Tel.: +39-080-5046190 Fax: +39-080-5042876

ASIA

Toshiba Mitsubishi-Electric Industrial Systems (Beijing) Corp.

21/F, Building B, In.do Mansion, 48 Zhichunlu, Haidian Distric, Beijing
Tel.: +86-10-5873-2277 Fax: +86-10-5873-2208

Shanghai Branch Office

2603 Shanghaimart, 2299 Yan An Road (W) Shanghai 200336
Tel.: +86-21-62360588 Fax: +86-21-62360599

Shanghai TMEIC Electric Drive Technology Corp.

Rm 2901, Shanghaimart, 2299 Yan'An Rd (W), Changning District,
Shanghai
Tel.: +86-21-6236-0588 Fax: +86-21-6441-3019

Shanghai Bao-ling Electric Control Equipment Co., Ltd.

12/F, No.8 Building, Lane 550, Keshan Road, Baoshan District,
Shanghai
Tel.: +86-21-3621-5323 Fax: +86-21-3621-2668

Guangzhou Toshiba Baiyun Ryoki Power Electronics Co., Ltd.

The No.18 Daling Nan Lu, Jiangao Town Shen Shan, Baiyun
District, Guangzhou
Tel.: +86-20-2626-1623 Fax: +86-20-2626-1290

TMEIC Asia Company Limited

1006 Nan Fung Commercial Centre, 19 Lam Lok St., Kowloon Bay,
Hong Kong
Tel.: +852-2243-3221 Fax: +852-2795-2250

Singapore Branch Office

150 Beach Road #15-08 Gateway West, Singapore 189720
Tel.: +65-6292-7226 Fax: +65-6292-0817

Taiwan Office

18F-5, 55 Chung Cheng 3rd Road, Kaohsiung 800, Taiwan
Tel.: +886-7-2239425 Fax: +886-7-2239122

TMEIC Industrial Systems India Private Limited

Unit #03-04, Third Floor, Block 2, Cyber Pearl, HITEC City,
Madhapur, Hyderabad, Andhra Pradesh, India 500081
Tel.: +91-40-44340000 Fax: +91-40-44340034

Mumbai Branch Office

901/D, Filix, L.B.S Road, Opp Asian Paints, Bhandup-West
Mumbai-400078
Tel.: +91-22-61555444 Fax: +91-22-61555400

Overseas Office

Middle East

Middle East Branch

Office No. 5EB-533, 5th Floor, 5EB, Dubai Airport Freezone,
P. O. Box 54512, Dubai, United Arab Emirates
Tel.: +971-4-6091-434 Fax: +971-4-6091-439

TMdrive is a trademark of Toshiba Mitsubishi-Electric Industrial Systems Corporation.

All other products mentioned are registered trademarks and/or trademarks of their respective companies.

All specifications in this document are subject to change without notice. The above brochure is provided free of charge and without obligation to the reader or to TMEIC, and is for informational purposes only. TMEIC does not accept, nor imply, the acceptance of any liability with regard to the use of the information provided. TMEIC provides the information included herein as is and without warranty of any kind, express or implied, including but not limited to any implied statutory warranty of merchantability or fitness for particular purposes. The brochure is not an implied or express contract.